


User Manual

Specifications	
MODE Mod	M8
LED	M50-F9
Batt	1 x 18650 Li-ion
Size	106mm x 24mm x 22.4mm
N.W.	68g (w/o batt)
Sw	Mech.; half-press to toggle
Modes	Eco-Low-Med-Hi + 2xClick Turbo
LowPwr	5%=3 flashes/20s; 1%=const. flash
Drvr	High-eff. const. current w/ mem
Safety	Rev. polarity & anti-accidental ON
Prot	Smart temp-ctrl
Col	Titanium Grey
Mat	SS bezel + Al-alloy body

Output & Time (lm)					
Lvl	Eco	Low	Med	Hi*	Turbo*
Lm	10	140	500	1700	3500
Run	≈8d	12h30m	3h30m	≈2h10m	≈2h
Charge	Use 15W+ charger; ~3h to full.				
Beam	240m				
Peak	14,400cd				
Drop	1m				
WP	IPX7 (Rain-safe)				

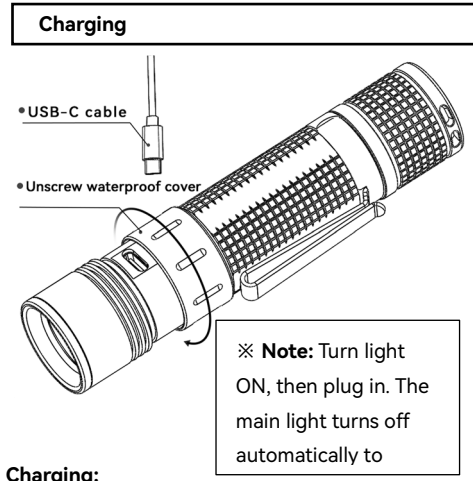


- Charging:**
1. Unscrew waterproof cover.
 2. Turn flashlight ON (tail switch).
 3. Connect Type-C Cable.
 4. Indicator: Red (Charging), Blue (Fully Charged / Standby). *If it shows blue immediately, please ensure the tail switch is turned ON.

Notes: Heating from the aluminum body is normal. Smart temperature control actively adjusts output, so runtime is an accumulated estimate.

Notes: Data based on ON THE ROAD 18650 battery (M50-F9 version) tested at 23±3°C. Results may vary depending on the flashlight, battery type, and environmental heat dissipation.

Operation

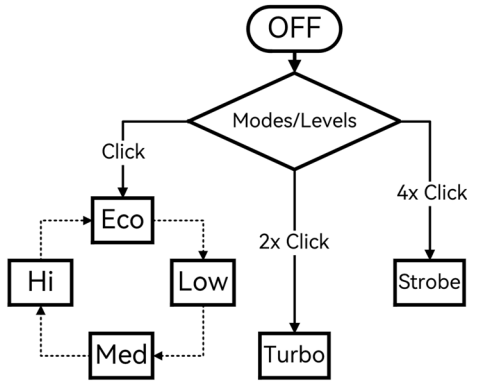

- Toggle:** When ON, half-press (no click) or rapid tail-switch clicks to cycle modes.
- Memory:** Saves current mode when OFF; recalls on restart.
- Turbo:** Double-click when ON for hidden [Turbo]

Normal Heating: Heating in [High] mode is a normal heat dissipation phenomenon. Do not cover or wrap the flashlight, as it relies on the aluminum alloy shell to dissipate heat.

※ Smart Temp Control: A built-in sensor actively adjusts brightness output to balance heat.

Features automatic shut-off protection if the temperature exceeds the safety threshold.

※ Don't shine directly in eyes. ※ If unused, store battery >80% in a cool, dry place. ※ Tighten cap after charging.

Insert battery with (+) end towards head.

Warranty Service

ON THE ROAD provides the following after-sales services

12-Month Warranty: Free repair service within 12 months of purchase.

Lifetime Limited Warranty: After 12 months, repairs are free of labor charges; only replacement parts will be billed at cost.

Exceptions: Warranty is void if damaged by intentional modification/disassembly, incorrect operation (e.g., reversed battery), or battery leakage.

Support: Contact your local dealer or email otrlight@gmail.com

Mfr: Shenzhen Luyou Electronics Co., Ltd
Add: No. 41 Paotai Rd, Gongming Street, Shenzhen, China
Tel: +86 400-670-1003 | **Web:** www.otrlight.com
Email: otrlight@gmail.com | **Zip:** 518106
Std: GB/T 7000.1-2023
 GB/T 7000.204-2023
 Made in China
 Rev: A02205260

